

# My Company Name

My Address

To: LACITER CONSTRUCTION  
 1144 TC HiWay  
 Kansas City, KS  
 15948


SPENCER TRACEY

Project: Materials Testing  
 27 Terrace Ave.

# Proctor Report

Project Number: M06-04-3650  
 Report Number: 1  
 Report Date: 18-Apr-06  
 Sample Type: sand, tr. gravel  
 Sampled By: EGT/JB  
 Source: EGT/DS  
 Sample Date: 17-Apr-06  
 Date Received: 17-Apr-06  
 Date Tested: 18-Apr-06

Rammer Type: manual  
 Preparation: moist  
 Method: ASTM D698  
 Liquid Limit: ll  
 Plasticity Index: pi  
 Elevation/Depth: ed  
 % Retained 5mm Screen: 5  
 % Retained 10mm Screen: 10  
 % Retained 20mm Screen: 20  
 Classification USCS: uscs  
 Classification AASHTO: aashto

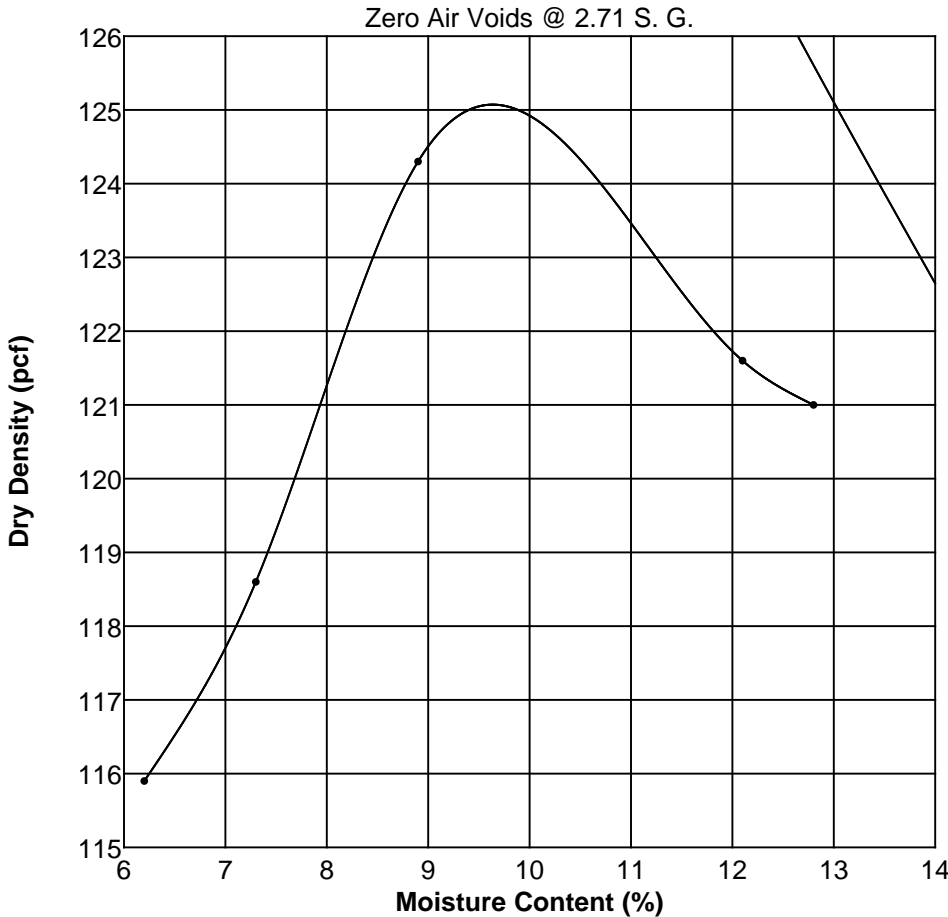

Optimum Moisture (%)	Max Dry Density (pcf)
9.6	125.1
8.8	138.3
8.0	154.6
7.2	175.2
6.4	202.2
5.6	239.1

Moisture Content (%)	Dry Density (pcf)	Wet Density (pcf)
6.2	115.9	123.1
7.3	118.6	127.3
8.9	124.3	135.4
12.1	121.6	136.3
12.8	121.0	136.5

sand, tr. gravel

Per: \_\_\_\_\_